



# INSTALLATION INSTRUCTIONS

## TABOS Series Electric Strike DES-3600

### Dimensions

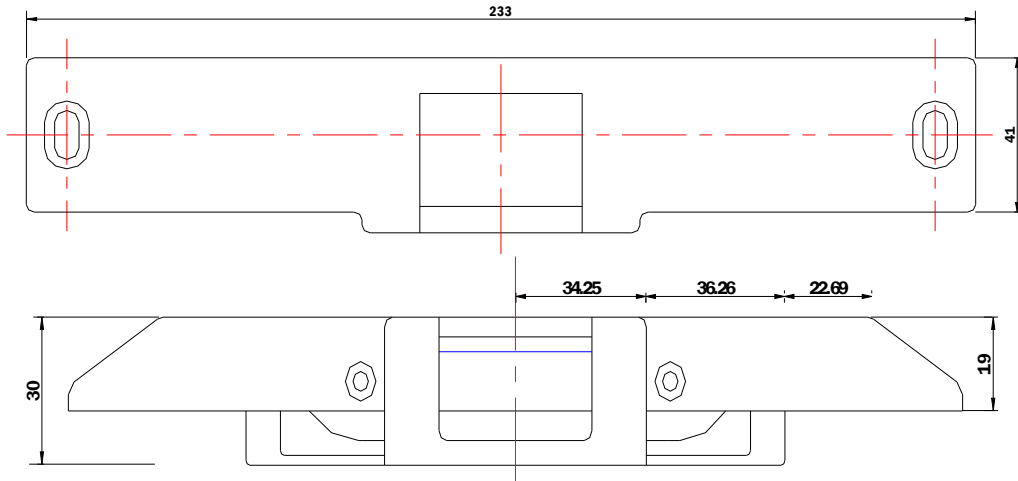

### Installation

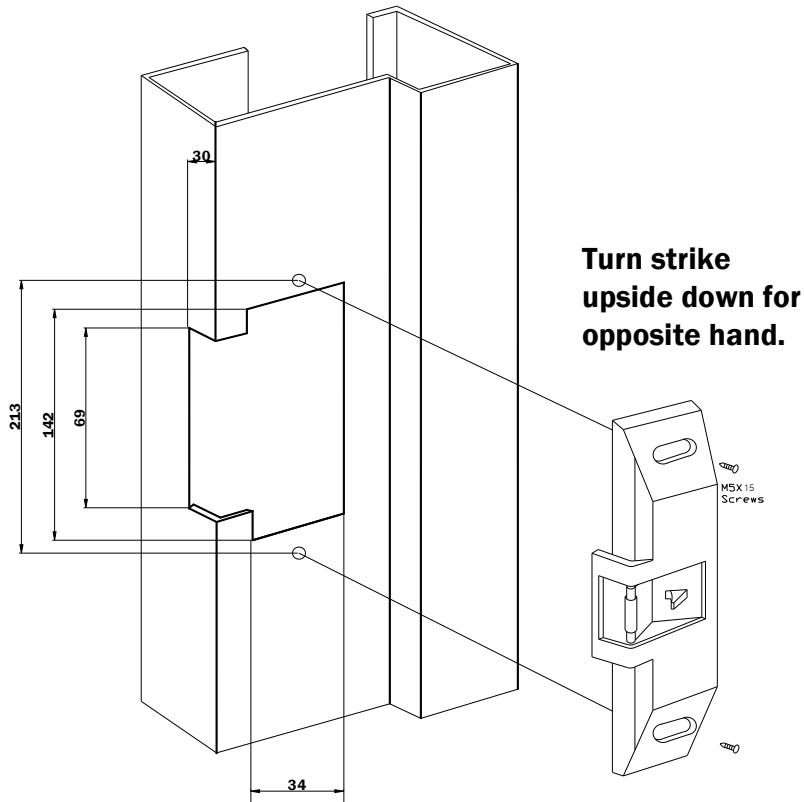



**DOORNICS CO., LTD.**

SK Techno B/D No. 903, 16-4, Seongsu-Dong 1-Ga, Seongdong-Gu,  
Seoul, 133-112, Korea  
Tel : +82-2-3409-2590~4 Fax : +82-2-3409-2100  
E-mail : doornics@chollian.net Website : www.doornics.co.kr



The products are manufactured under an ISO 9001 & 2000 and Certified CE.

**Wiring**

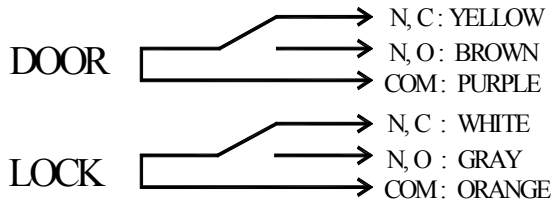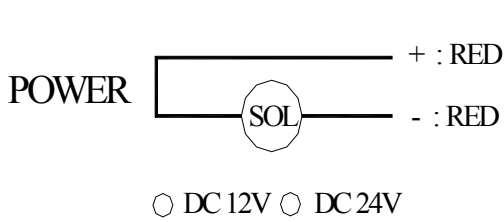

**Electrical Data :**


**DC12V@160mA±10% , DC24V@110mA ±10%**



**Connection of an incorrect voltage may result in damage not covered by the product warranty.**

**How to change Fail Safe / Fail Secure**

**Standard Configuration : 12 VDC, Fail- Safe**

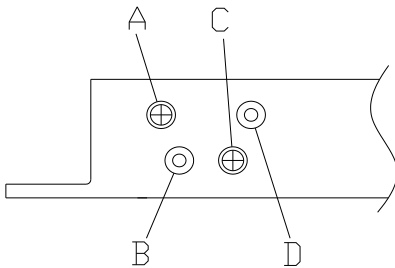

Status	A	B	C	D
Fail Secure (Locks when power fails)	0		0	
Fail Safe (Unlocks when power fails)		0		0

**Notes**

**Fail – Secure Operation : Unlocks when energized.**

**If power fails, the strike remains in a locked condition.**

**Fail – Safe Operation : Locks when energized. Used in applications requiring automatic unlocking in case of power failure.**

**Duplex monitoring (Lock & Door)**

Unlocked	Orange (COM), White (N.C)
Locked	Orange (COM), Gray (N.O)

Door In condition	Purple (COM), Brown (N.O)
Door Out condition	Purple (COM), Yellow (N.C)

**Two internally mounted switches (Form “C”) to indicate when the latchbolt is engaged in the strike jaws and a locked / unlocked solenoid status.**

**\* Standard Package : Mounting Screws (M5x15) 2pcs,**

**DOORNICS CO., LTD.**

SK Techno B/D No. 903, 16-4, Seongsu-Dong 1-Ga, Seongdong-Gu,  
Seoul, 133-112, Korea  
Tel : +82-2-3409-2590~4 Fax : +82-2-3409-2100  
E-mail : doornics@chollian.net Website : www.doornics.co.kr



**The products are manufactured under an ISO 9001 & 2000 and Certified CE.**